

# Product Data

## Industrial Coating for Corrosion Protection at Elevated Temperatures

Belzona® 1591 (Ceramic XHT) is a two component high temperature coating system designed to resist water, hydrocarbons, aqueous solutions and pressurised steam up to a temperature of 180°C (356°F).


### Belzona® 1591 (Ceramic XHT) will:

- Simplify maintenance procedures
- Minimise downtime
- Provide excellent erosion-corrosion resistance
- Extend equipment life

Belzona® 1591 (Ceramic XHT) exhibits excellent erosion corrosion resistance at elevated temperatures, through a unique binary curing mechanism. This mechanism allows application and cure at ambient temperatures with additional higher temperature resistance being achieved in service through post curing.


## Belzona® 1591

Ceramic XHT

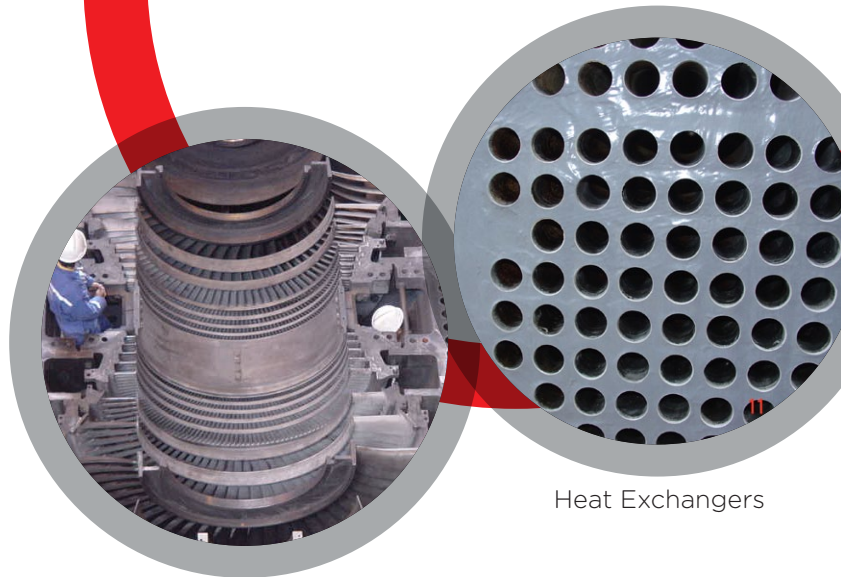

Steam Turbine Casings

Heat Exchangers

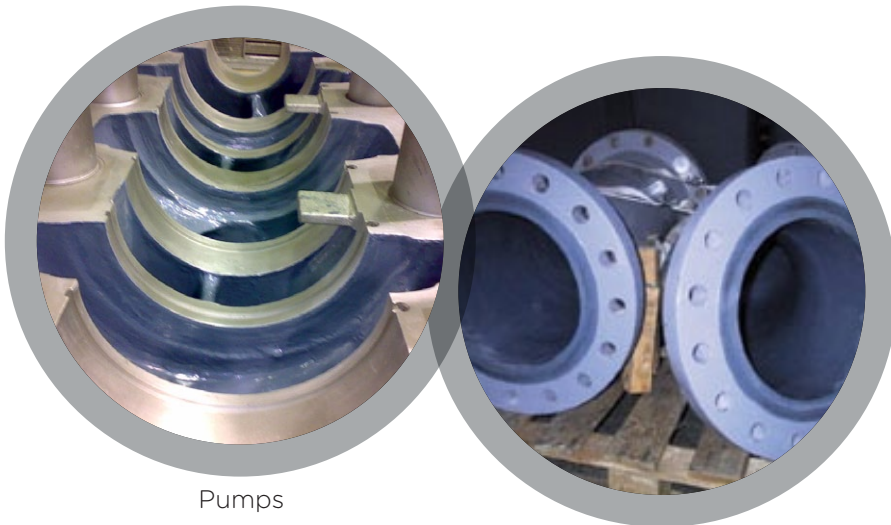

Pumps

Isolation Spools

### Applications for Belzona® 1591 (Ceramic XHT) include:

- Separators
- Heat exchangers
- Knock-out drums
- Regenerators
- Pumps
- Absorbers
- Scrubbers
- Return tanks
- Steam turbine casings
- Distillation units
- Isolation spools

[www.belzona.com](http://www.belzona.com)

Belzona® provides the solution to your repair and maintenance needs.

  
**BELZONA®**  
Repair • Protect • Improve

# Belzona® 1591 (Ceramic XHT) is:

## Simple

- Easily mixed and applied
- Allows in service curing
- Applied as a single coat system

## Safe

- Spark testable for pin-holes and coating defects
- Solvent free

## Versatile

- Bonds to a wide range of metallic substrates
- Adhesion maintained at elevated temperatures
- Suitable for use in pressurised water systems up to 180°C
- Accidental mechanical damage & application defects easily repaired

## Effective

- Resistant to thermal cycling
- Resistant to steam out process
- Excellent resistance to a wide range of chemicals
- Resistance to high pressures
- Corrosion protection in immersed conditions at temperatures in excess of 180°C (356°F)
- Ability to withstand rapid depressurisation
- Outstanding resistance to blistering

## QUALITY PRODUCTS - TECHNICAL SUPPORT

The Belzona® product range is manufactured through stringent quality and environmental control guidelines complying with the internationally recognised requirements of **ISO 9001:2008** and **ISO 14001:2004**.

Belzona® has a global distribution network of over 140 Distributors operating in 120 countries. Local support is provided by a trained Technical Consultant who will diagnose the problem, recommend the solution and provide 24 hour on-site application supervision and advice.

For more information, please contact your local Belzona® representative:

# Belzona® 1591

Ceramic XHT



Separators

For further detailed information refer to:

Belzona® **Product Specification**

Belzona® **Instructions For Use**

Belzona® **KNOW-HOW** *In Action*

Copyright © 2010 by Belzona® International Ltd. All rights reserved. No part of this work covered by the copyrights hereon may be reproduced or used in any other form or by any means – graphic, electronic, or mechanical including photocopying, recording, taping, or information storage and retrieval systems – without permission of the publisher. Belzona® and Belest® are registered trademarks.

[www.belzona.com](http://www.belzona.com)



**Europe & Africa**  
Belzona Polymers Ltd.  
Harrogate, UK  
t: +44 1423 567641  
f: +44 1423 505967  
e: [belzona@belzona.co.uk](mailto:belzona@belzona.co.uk)

**The Americas**  
Belzona Inc.  
Miami, FL USA  
t: +1 (305) 594-4994  
f: +1 (305) 599-1140  
e: [belzona@belzona.com](mailto:belzona@belzona.com)

**Asia & Oceania**  
Belzona Asia Pacific  
Laem Chabang, Thailand  
t: +66 38 491031  
f: +66 38 491102  
e: [belzona@belzona.cn](mailto:belzona@belzona.cn)

**China**  
Belzona Hong Kong  
Hong Kong, China  
t: +852 3101 7461  
f: +852 3101 7530  
e: [belzona@belzona.hk](mailto:belzona@belzona.hk)

**BELZONA®**  
Repair • Protect • Improve