



# SaniForce™

A Complete Sanitary Pump Line



unleash the  
**POWER**


PROVEN QUALITY. LEADING TECHNOLOGY.

The new SaniForce line **saves you time and money** by pumping the most difficult materials – quickly and safely!

### SaniForce Pumps:

- Air-operated double diaphragm pumps
- Piston transfer pumps
- Drum and bin unloaders
- High pressure cleaning equipment

unleash the  
**POWER**

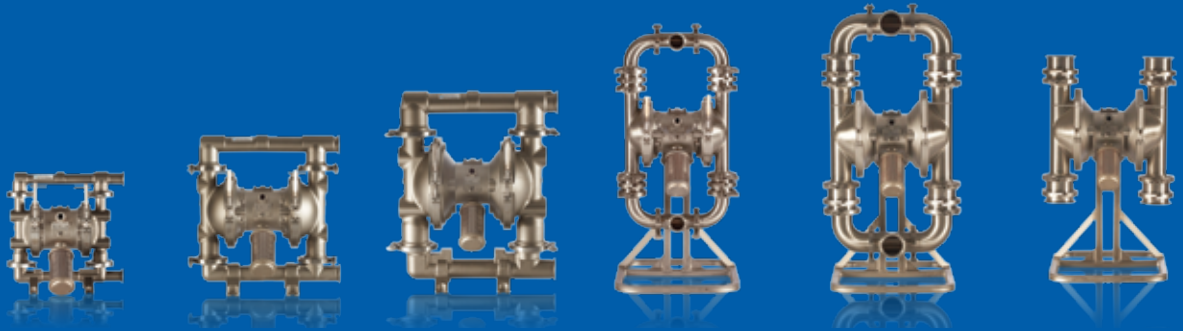

Model	1040	1590	2150	1590 HS & 3-A	3150 HS & 3-A	Meat/Poultry
Max Flow Rate	40 gpm (151 lpm)	90 gpm (340 lpm)	150 gpm (568 lpm)	90 gpm (340 lpm)	150 gpm (568 lpm)	150 gpm (568 lpm)
Max Fluid Pressure	120 psi (8 bar, 0.8 MPa)	120 psi (8 bar, 0.8 MPa)	120 psi (8 bar, 0.8 MPa)	120 psi (8 bar, 0.8 MPa)	120 psi (8 bar, 0.8 MPa)	120 psi (8 bar, 0.8 MPa)
Pump Style	Ball	Ball	Ball	Ball	Ball or Flapper	Flapper
Suction Lift (Wet)	29 ft (8.84 m)	29 ft (8.84 m)	29 ft (8.84 m)	28 ft (8.5 m)	Ball = 18 ft (5.5 m) Flapper = 10 ft (3 m)	10 ft (3 m)
Max Pumpable Solids	1/8 in (3.2 mm)	3/16 in (4.8 mm)	1/4 in (6.3 mm)	5/8 in (15.9 mm)	Ball = 1 in (25.4 mm) Flapper = 2.5 in (63.5 mm)	2.5 in (63.5 mm)
Viscosity Range	Up to 10,000 cps	Up to 15,000 cps	Up to 20,000 cps	Up to 15,000 cps	Up to 20,000 cps	Up to 25,000 cps
Flyer	320462	320462	320462	338499	338499	338067
Manual	311879	311879	311879	310622	310622	310622

# Graco's Complete Line of Sanitary Pumps



Transfer a **broad range of viscosities** from fruit juices and pizza sauce to caramel and peanut butter.

## SaniForce Pumps and Unloaders:

- Move material faster
- Increase efficiency
- Improve processes
- Pump high viscosity materials



6:1	5:1	12:1	Diaphragm Drum Unloaders	Piston Drum Unloaders	Diaphragm Bin Evacuation	Piston Bin Evacuation
4 gpm (15 lpm)	14 gpm (53 lpm)	8.5 gpm (32 lpm)	90 to 150 gpm (340 to 568 lpm)	4 to 14 gpm (15 to 53 lpm)	300 gpm (1,135 lpm)	12 to 64 gpm (56 to 212 lpm)
600 psi (41 bar, 4.1 MPa)	400 psi (28 bar, 2.8 MPa)	1200 psi (83 bar, 8.3 MPa)	120 psi (8 bar, 0.8 MPa)	1200 psi (83 bar, 8.3 MPa)	120 psi (8 bar, 0.8 MPa)	1200 psi (83 bar, 8.3 MPa)
Double ball Priming piston	Double ball Priming piston	Priming piston	Ball or Flapper	Double ball or Priming piston	Ball or Flapper	Double ball or Priming piston
N/A	N/A	N/A	N/A	N/A	N/A	N/A
1/8 in (3.2 mm)	1/4 in (6.4 mm)	1/4 in (6.4 mm)	Ball = 1 in (25.4 mm) Flapper = 2.5 in (63.5 mm)	1/8 in to 1/4 in (3.2 to 6.4 mm)	Ball = 1 in (25.4 mm) Flapper = 2.5 in (63.5 mm)	1/4 in (6.4 mm)
Siphon: Up to 5,000 cps Immersion: Up to 100,000 cps	Siphon: Up to 5,000 cps Immersion: Up to 100,000 cps	Siphon: Up to 5,000 cps Immersion: Up to 100,000 cps	25,000 to 100,000 cps	25,000 to 500,000 cps	25,000 to 100,000 cps	25,000 to 500,000 cps
338591	338591	338591	338590	338590	338589	338589
3A0733	3A0734	3A0735	3A0591	3A0591	311163	311163

# SaniForce Piston Pumps

## Save money by increasing efficiency

Graco's powerful line of piston pumps move extremely difficult materials when others cannot. They have pressure ratios up to 12:1 and are ideal for low to medium viscosity materials.

The air motors improve serviceability, increase efficiency and offer a lower cost of ownership. The quick knockdown lowers are made with 300 series stainless steel for long-lasting durability.



**SaniForce 6:1  
Piston Pump**

- Siphon up to 5,000 cps and 100,000 cps if immersed
- Flow rates up to 4 gpm (15 lpm)
- Lowers available in both stubby and drum lengths

**SaniForce 5:1  
Piston Pump**

- Siphon up to 5,000 cps and 100,000 cps if immersed
- Flow rates up to 14 gpm (53 lpm)
- Lowers available in both stubby and drum lengths

**SaniForce 12:1  
Piston Pump**

- Siphon up to 5,000 cps and 100,000 cps if immersed
- Flow rates up to 8.5 gpm (32 lpm)
- **New quick knockdown design**


**Common  
Applications**

Fluid transfer and supply of low to medium viscosity fluids  
Food-related applications  
Cosmetic and pharmaceutical applications

**Common  
Materials**

Fruit juice concentrates  
Cream candy fillings  
Ice cream variegates  
Cosmetics

# Move the Most Difficult Materials

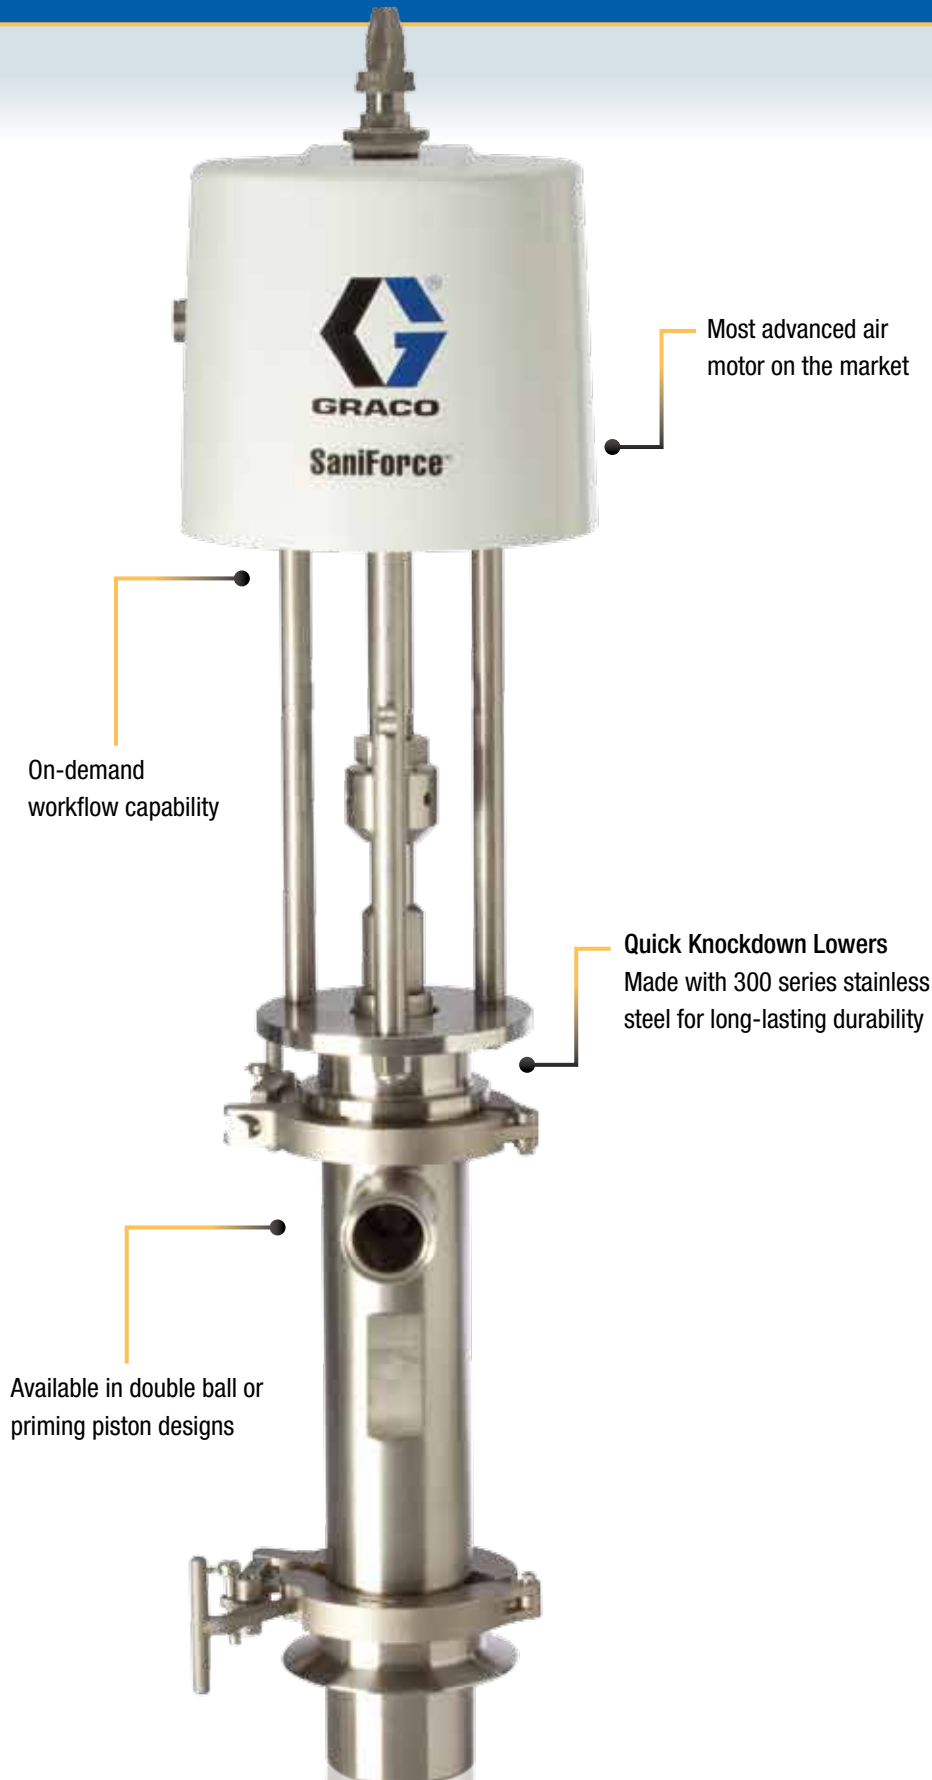

## FDA-Compliant Kydex® Shroud

- Easily removable to clean and access modular air valve – reducing downtime



**All SaniForce Piston Pumps have Quick Knockdown Lowers for Fast and Easy Cleaning!**

# SaniForce 1040, 1590 & 2150

## When other pumps fail, Graco pumps excel!

Graco's SaniForce 1040, 1590 and 2150 air-operated diaphragm pumps not only have **flow rates up to 25% greater** than many competitive pumps with PTFE diaphragms, but have one of the **best, most durable, lube-free air valves** in the industry.

Ideal for applications requiring high flow rates and portability, Graco's dependable diaphragm pumps offer a wide range of food-grade elastomers including Santoprene, PTFE, and overmolded EPDM/PTFE.

### Pump Finish

- Cast 316 SST
- Sanitary shot-blasted wetted sections with 125 Ra finish


Bolt-through and overmolded diaphragm options available

Fluid contact areas are all FDA-compliant and meet CFR Title 21



**2150**

- 2.5 in (63.5 mm) tri-clamp connections
- Flow rates of 150 gpm (568 lpm)

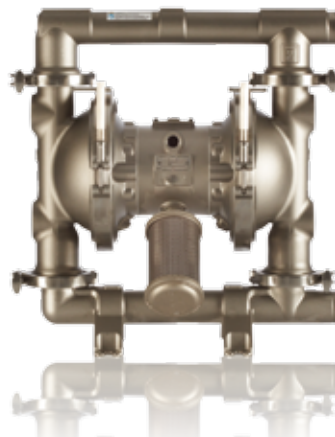

**1590**

- 2.0 in (50 mm) tri-clamp connections
- Flow rates up to 90 gpm (340 lpm)



**1040**

- 1.5 in (38 mm) tri-clamp connections
- Flow rates of 40 gpm (151 lpm)

### Common Applications

Evacuation of food to mixing kettles
Transferring from original containers to mixing tanks
High volume evacuation of liquid concentrates from holding vessels
Repackaging of fluids from original containers to smaller receptacles
Feed filling/packaging stations

### Common Materials

Concentrated fruit juices
Sauces, pastes and starches
Wine
Jams and jellies
Oils

# Improve Your Process and Reduce Downtime

## Graco Air Valves are durable, reliable and easy to repair!

- Increase durability and reduce repair time with fewer moving parts
- Three-way pilot valve for non-stick operation
- Externally serviceable for quick, inexpensive repairs



Tri-clamp inlet and outlet connections

## Stop Harboring Bacteria!

Graco overmolded the diaphragm plate with PTFE on the fluid side and EPDM on the air side on our **PTFE/EPDM diaphragms** so there is no place to harbor bacteria. This improves wear, durability and cleanability – making SaniForce diaphragm pumps one of the **easiest to clean in the market.**


- Improve wear and diaphragm life with no exposed diaphragm plate on the fluid side
- Longer diaphragm life in abrasive applications that still require PTFE
- Available on the SaniForce 1040, 1590, 2150 and SaniForce 1590 HS and 3150 HS



# SaniForce 1590 and 3150 High Sanitation

## Easy to clean, quick knockdown design

Graco's SaniForce High Sanitation (HS) pumps are ideal for applications that require an electropolished 32 Ra finish and benefit from the convenience of a quick knockdown design. All models are FDA-compliant and can be disassembled in five minutes or less.

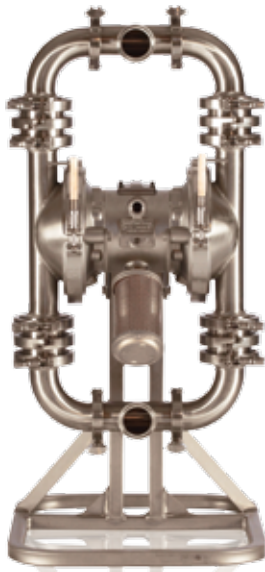

**1590 HS**

- 2.0 in (50.8 mm) tri-clamp connections
- Flow rates up to 90 gpm (340 lpm)



**3150 HS**

- Up to 4.0 in (101.6 mm) tri-clamp connections
- Flow rates up to 150 gpm (568 lpm)



3A certifications are available on a variety of SaniForce 1590 and 3150 models.

32 Ra formed/welded stainless steel with sanitary finish

Flow rates ranging from 90-150 gpm (340-568 lpm)

Patented, durable, lube-free air valve

Interchangeable flapper and ball check

### Common Applications

- Evacuation of food to mixing kettles
- Transferring from original containers to mixing tanks
- High volume evacuation of liquid concentrates from holding vessels
- Repackaging of fluids from original containers to smaller receptacles

### Common Materials

- Fruit filling
- Spaghetti sauce
- Muffin and cake batter
- Grapes with and without stems
- Potato salad
- Cultured dairy products

SANITARY

# Designed for Easy Cleaning

## EPDM Overmolded Diaphragms

- Approved for 3A applications
- Easy cleaning with smooth, flat surfaces and no recessed areas
- No exposed diaphragm plates to prevent contaminant collection




## Meat and Poultry Pump

The SaniForce Meat and Poultry Flapper pump handles solids up to 2.5 inches (6.3 cm) in diameter and features Graco's durable, non-sticking air valve. Easily passes necks, gizzards, livers, hearts, feet and slurries.



### Common Applications

- |                        |
|------------------------|
| Meat processing        |
| Poultry processing     |
| Pet food manufacturers |
| Batters                |

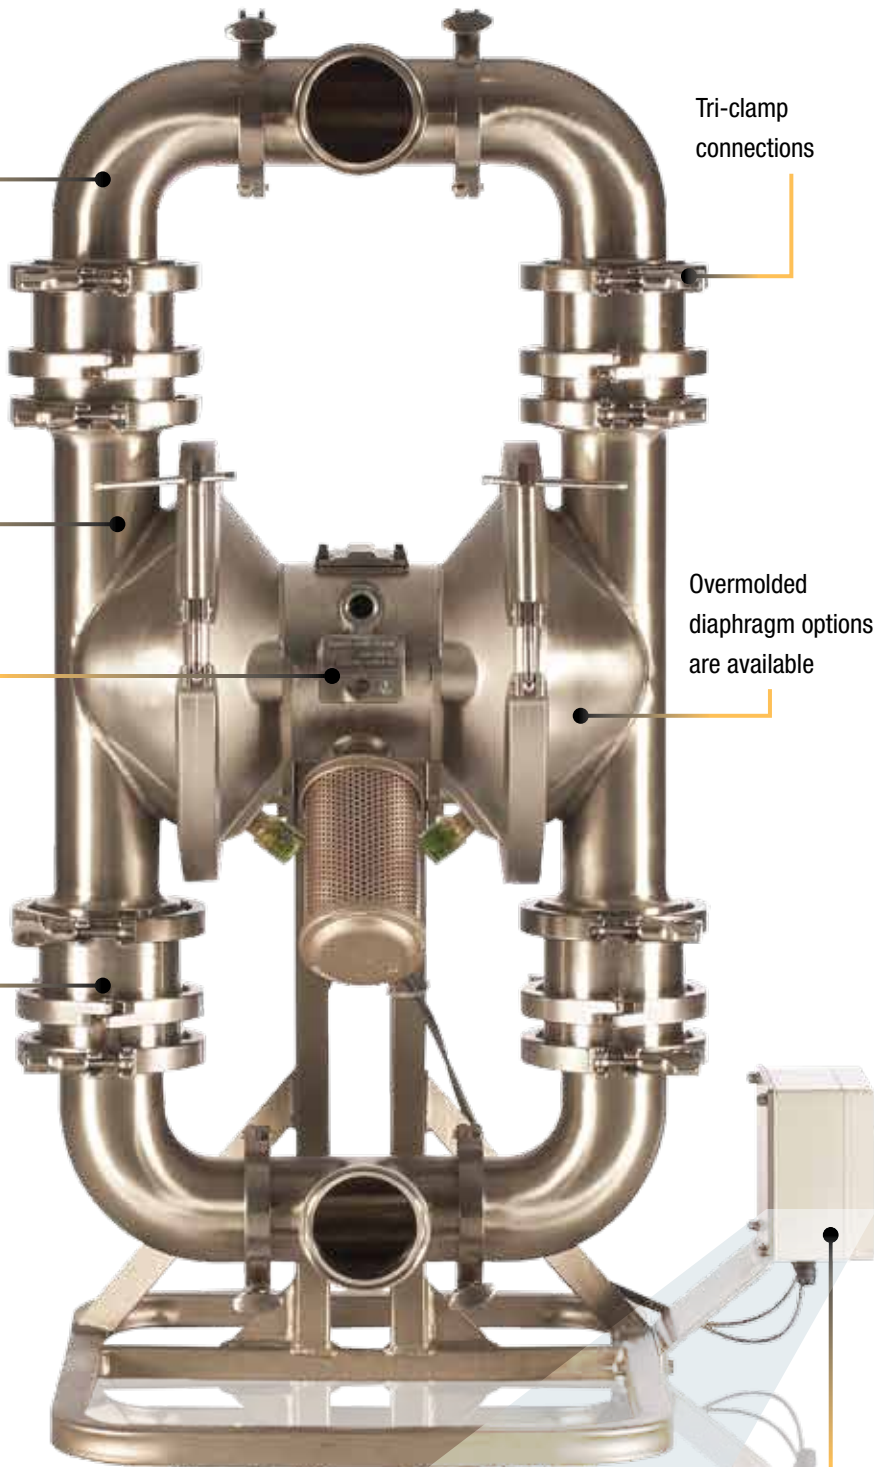

Tri-clamp connections

Overmolded diaphragm options are available




Leak detector available on 3A models

# SaniForce Drum Unloaders

Need to transfer 500,000 cps materials? No problem!

Graco's **SaniForce** drum unloaders can evacuate medium to high viscosity products from their original 55-gallon (208 l) containers, in less than 5 minutes – without diluting the material.

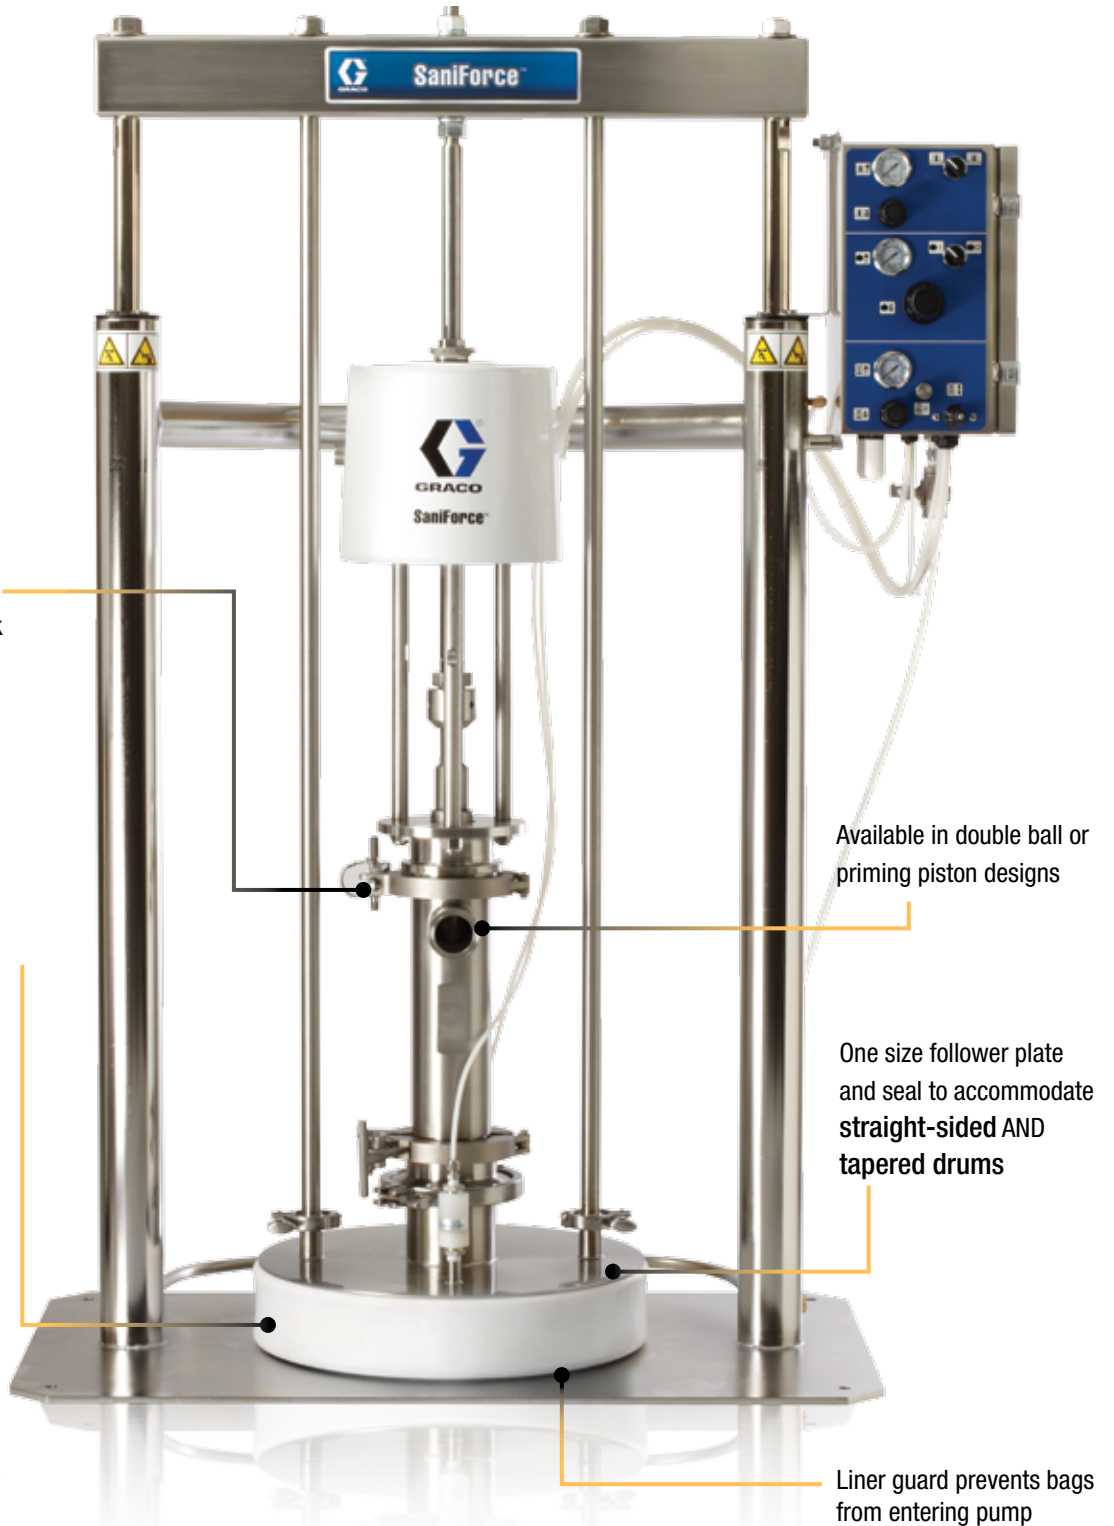

Sanitary flange clamps for quick disassembly

Available in double ball or priming piston designs

## Wiper Seal Features

- FDA-compliant inflatable ram plate seal
- Faster change-out of empty containers
- 99% evacuation rate

One size follower plate and seal to accommodate straight-sided AND tapered drums

Liner guard prevents bags from entering pump




# Configure your own SaniForce Drum Unloading System

It's easy as 1-2-3.

Choose the Ram Frame Material + Control Type + Pump Type to build your own SaniForce Drum Unloading System.

1

Ram Frame Material

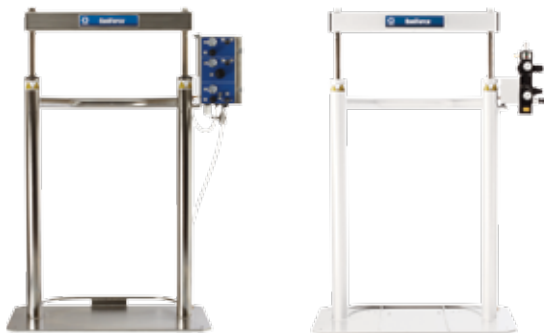

300 Series Stainless Steel OR Painted Carbon Steel

2

Controls Type



Enclosed Controls\* OR Exposed Controls

\*Available with SST frame only

3

SaniForce Piston Pump




SaniForce 6:1

SaniForce 5:1

SaniForce 12:1

OR SaniForce Diaphragm Pump

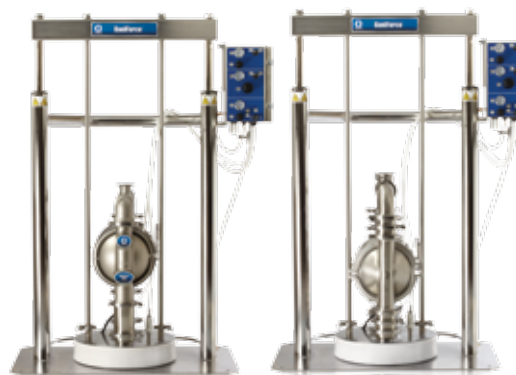

SaniForce 2150

SaniForce 3150 HS

All pumps feature an on-demand workflow capability and can also be taken apart quickly for applications that require frequent sanitation.

<b>Common Applications</b>	Unload medium to high viscosity products, up to 500,000 cps, from 55-gallon containers without diluting the material
----------------------------	--

<b>Common Materials</b>	Tomato paste	Cosmetics
	Peanut butter	Jams and jellies
	Icing and frosting	Caramel
	Toothpaste	Corn syrup

# SaniForce Bin Evacuation Systems (BES)

The **most sanitary way** to unload materials without introducing airborne bacteria!

Save time and money in your facility by unloading materials efficiently from 300-gallon (1135.6 l) “bag-in-bin” containers – eliminating manual scooping or bin dumping.

Complete bin unloading saves water evaporation costs and provides better process control while removing the need for costly booster pumps.

Flow rates up to 100 gpm (400 lpm) can easily be achieved on medium to high viscosity products up to 500,000 cps.



**SaniForce 3150 BES  
with Diaphragm Pumps**



**SaniForce BES  
with Piston Pumps**

## Common Applications

Evacuate viscous products from their original 300-gallon containers without dilution

## Common Materials

Tomato paste	Cosmetics
Peanut butter	Jams and jellies
Icing and frosting	Caramel
Toothpaste	Corn syrup

# Unload a Tote in 5 Minutes or Less!

Keep your product clean, **move it quickly** and boost your bottom line with a SaniForce bin evacuation system.

99% evacuation rate  
for certain materials

Available with  
pneumatic or  
electronic controls

Evacuation times of  
*less than five minutes*  
for most materials

Inflatable wiper creates  
a tight seal preventing  
contaminants from  
entering the container



Unique floating ram plate eliminates  
the need for exact positioning of bins  
under the ram plate

# Hydra-Clean® Pressure Washers

Gas and electric can't be used? Choose the **air-driven** Hydra-Clean pressure washer for your cleaning solution.

Ideal for cleaning and sanitizing food, beverage and pharmaceutical processing facilities, Hydra-Clean pressure washers can be used with hot or cold water, detergents or strong chemical solutions up to 200°F (93°C).



# A Complete Line of Chemical Transfer Pumps

With its patented air valve, Graco pumps are a **dependable, easy-to-service** solution for CIP application requirements.



**Husky™ 205 Polypropylene**

- 1/4 in (6.3 mm) connection
- Max flow: 5 gpm (19 lpm)



**Husky 205 PVDF**

- 1/4 in (6.3 mm) connection
- Max flow: 5 gpm (19 lpm)



**Husky 307 Polypropylene**

- 3/8 in (9.4 mm) connection
- Max flow: 7 gpm (26 lpm)



**Husky 515 Polypropylene**

- 1/2 in (12.7 mm) connection
- Max flow: 15 gpm (57 lpm)



**Husky 515 PVDF**

- 1/2 in (12.7 mm) connection
- Max flow: 15 gpm (57 lpm)



**Husky 716 SST**

- 3/4 in (19.1 mm) connection
- Max flow: 16 gpm (61 lpm)



**Husky 1050 Polypropylene**

- 1 in (25.4 mm) connection
- Max flow: 50 gpm (189 lpm)



**Husky 1050 PVDF**

- 1 in (25.4 mm) connection
- Max flow: 50 gpm (189 lpm)



**Husky 1050 SST**

- 1 in (25.4 mm) connection
- Max flow: 50 gpm (189 lpm)

GRACO PUMPS



## ABOUT GRACO

### PROVEN QUALITY. LEADING TECHNOLOGY.

Founded in 1926, Graco is a world leader in fluid handling systems and components. Graco products move, measure, control, dispense and apply a wide range of fluids and viscous materials used in vehicle lubrication, commercial and industrial settings.

The company's success is based on its unwavering commitment to technical excellence, world-class manufacturing and unparalleled customer service. Working closely with qualified distributors, Graco offers systems, products and technology that set the quality standard in a wide range of fluid handling solutions. Graco provides equipment for spray finishing, protective coating, paint circulation, lubrication, and dispensing sealants and adhesives, along with power application equipment for the contractor industry. Graco's ongoing investment in fluid management and control will continue to provide innovative solutions to a diverse global market.

## GRACO LOCATIONS

### MAILING ADDRESS

P.O. Box 1441  
Minneapolis, MN 55440-1441  
Tel: 612-623-6000  
Fax: 612-623-6777

### AMERICAS

#### MINNESOTA

Worldwide Headquarters  
Graco Inc.  
88-11th Avenue N.E.  
Minneapolis, MN 55413

### EUROPE

#### BELGIUM

European Headquarters  
Graco N.V.  
Industrieterrein-Oude Bunders  
Slakweidestraat 31  
3630 Maasmechelen,  
Belgium  
Tel: 32 89 770 700  
Fax: 32 89 770 777

### ASIA PACIFIC

#### AUSTRALIA

Graco Australia Pty Ltd.  
Suite 17, 2 Enterprise Drive  
Bundoora, Victoria 3083  
Australia  
Tel: 61 3 9468 8500  
Fax: 61 3 9468 8599

#### CHINA

Graco Hong Kong Ltd.  
Shanghai Representative Office  
Room 118 1st Floor  
No.2 Xin Yuan Building  
No.509 Cao Bao Road  
Shanghai, 200233  
The People's Republic of China  
Tel: 86 21 649 50088  
Fax: 86 21 649 50077

### INDIA

Graco Hong Kong Ltd.  
India Liaison Office  
Room 432, Augusta Point  
Regus Business Centre 53  
Golf Course Road  
Gurgaon, Haryana  
India 122001  
Tel: 91 124 435 4208  
Fax: 91 124 435 4001

### JAPAN

Graco K.K.  
1-27-12 Hayabuchi  
Tsuzuki-ku  
Yokohama City, Japan 2240025  
Tel: 81 45 593 7300  
Fax: 81 45 593 7301

### KOREA

Graco Korea Inc.  
Shinhan Bank Building  
4th Floor #1599  
Gwanyang-Dong, Dongan-Ku,  
Anyang-si, Korea 431-060  
Tel: 82 31 476 9400  
Fax: 82 31 476 9801

## SALES/ DISTRIBUTION/ SERVICE

Call today for product information or to request a demonstration.

**877-84GRACO (1-877-844-7226)** or visit us at [www.graco.com](http://www.graco.com).

Graco Inc. is registered to I.S. EN ISO 9001

North America  
Customer Service  
800-328-0211  
Fax 877-340-6427