


# Hi-Flo XLT

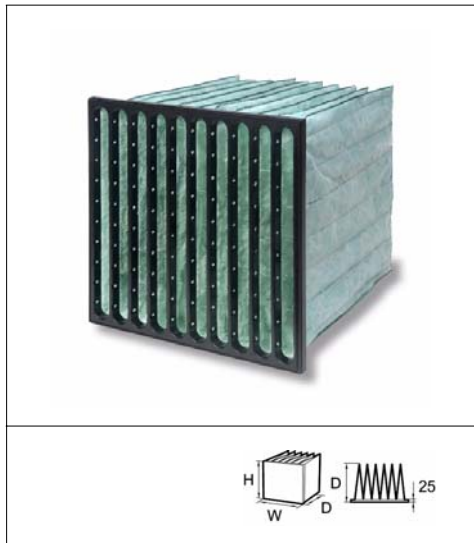

## Advantages

- The latest developed glass fibre media
- Low initial pressure drop
- Flat pressure drop curve
- New developed pocket design for the best air distribution
- Conical pockets
- Moulded, rigid and aerodynamic shaped plastic frame
- Less energy consumption

**Application:** Air conditioning applications and as pre filters for clean rooms

**Type:** Pocket filters with high efficiency

**Frame:** PS plastic - moulded and combustible

**Media:** Glass fibre

**Filter classification EN779:2002:** F6, F7 och F9

**Temperature:** 70°C

**Rekommended final pressure drop:** 450 Pa (suggested economical change point 250 Pa)

**Air flow:** Nominell air flow  $\pm 25\%$

**Packing:** Environmental friendly cardboard boxes easy to carry. We are connected to the REPA register

**Holding frames:** Mounting frames in type SP or in filter housing FCB-HF



Type	Dimensions (WxHxD) mm	Number of pockets	Filter classification EN779:2002	Air Flow nominell m <sup>3</sup> /h	Initial pressure drop Pa	Media area m <sup>2</sup>	Energy class
Hi-Flo XLT 6	592x592x370	10	F6	3400	80	4,3	C
Hi-Flo XLT 6	287x592x370	5	F6	1700	80	2,2	C
Hi-Flo XLT 6	287x287x370	5	F6	800	80	0,9	C
Hi-Flo XLT 6	592x592x520	10	F6	3400	60	6,1	B
Hi-Flo XLT 6	287x592x520	5	F6	1700	60	3,1	B
Hi-Flo XLT 6	287x287x520	5	F6	800	60	1,2	B
Hi-Flo XLT 6	592x592x640	10	F6	3400	55	7,5	B
Hi-Flo XLT 6	287x592x640	5	F6	1700	55	3,8	B
Hi-Flo XLT 6	287x287x640	5	F6	800	55	1,5	B
Hi-Flo XLT 7	592x592x370	10	F7	3400	115	4,3	B
Hi-Flo XLT 7	287x592x370	5	F7	1700	115	2,2	B
Hi-Flo XLT 7	287x287x370	5	F7	800	115	0,9	B
Hi-Flo XLT 7	592x592x520	10	F7	3400	95	6,1	A
Hi-Flo XLT 7	287x592x520	5	F7	1700	95	3,1	A
Hi-Flo XLT 7	287x287x520	5	F7	800	95	1,2	A
Hi-Flo XLT 7	592x592x640	10	F7	3400	80	7,5	A
Hi-Flo XLT 7	287x592x640	5	F7	1700	80	3,8	A
Hi-Flo XLT 7	287x287x640	5	F7	800	80	1,5	A
Hi-Flo XLT 9	592x592x520	10	F9	3400	145	6,1	B
Hi-Flo XLT 9	287x592x520	5	F9	1700	145	3,1	B
Hi-Flo XLT 9	287x287x520	5	F9	800	145	1,2	B
Hi-Flo XLT 9	592x592x640	10	F9	3400	130	7,5	A
Hi-Flo XLT 9	287x592x640	5	F9	1700	130	3,8	A
Hi-Flo XLT 9	287x287x640	5	F9	800	130	1,5	A